



Note

Before starting work, ensure that the system is completely de-energised. All work on the electrical system must only be carried out when the system is de-energised.

1. Preparation

Please have the following tools and materials to hand before you begin the installation:

1. Data logger including multi-pin connector
2. screwdriver
3. A smartphone or tablet for scanning the QR code

2. Disconnect the power supply

Switch off the chain cleaning system completely and secure it to prevent it from being switched on again accidentally


4. Turn the system's main switch to the OFF position.
5. Secure the system against accidental activation (e.g. with a warning sign).
6. Check that there is no longer any voltage at the control unit.

3. Replace the multi-pin connector

To connect the data logger, the multi-pin connector must be removed and replaced with the new wiring harness.

Installation of datalogger


Chain-type manure removal system

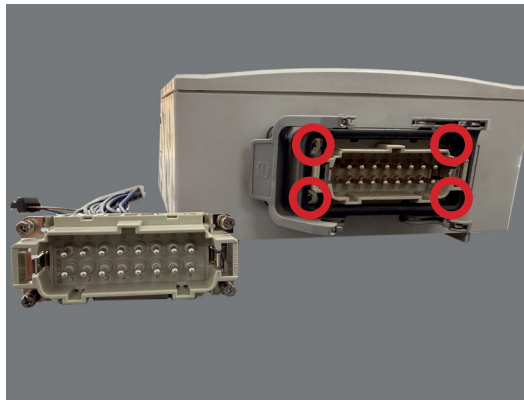

1. Disconnect the multi-pin cable at the top of the control unit and loosen the 4 fixing screws on the multi-pin connector and the top cover



2. Carefully remove the cover and disconnect the plug from the circuit board. Then remove the multi-pin connector

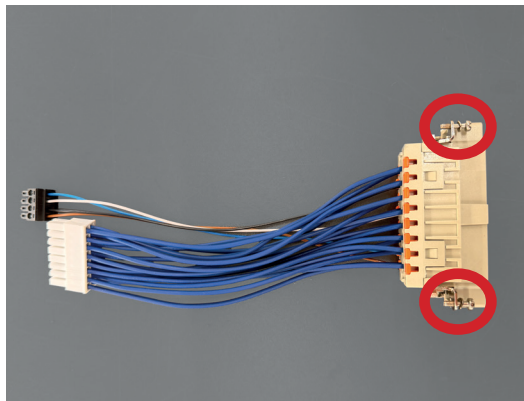

3. Feed the new wiring harness through the housing and reattach the multi-pin connector in the same direction using the four screws.



4. Reconnect the plug on the circuit board. The data logger can then simply be stowed away in the control unit housing. Make a note of the serial number, which begins with 'DL-', for further setup

Video tutorial Setup:

